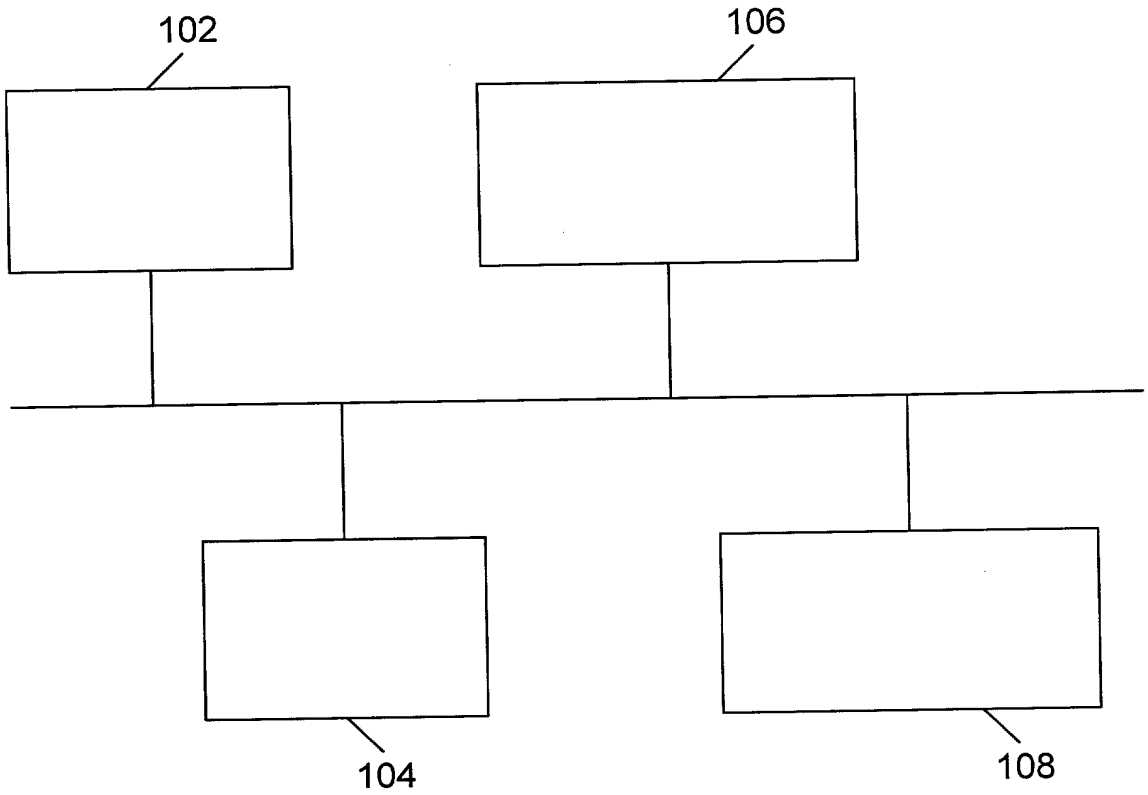

Figure 1

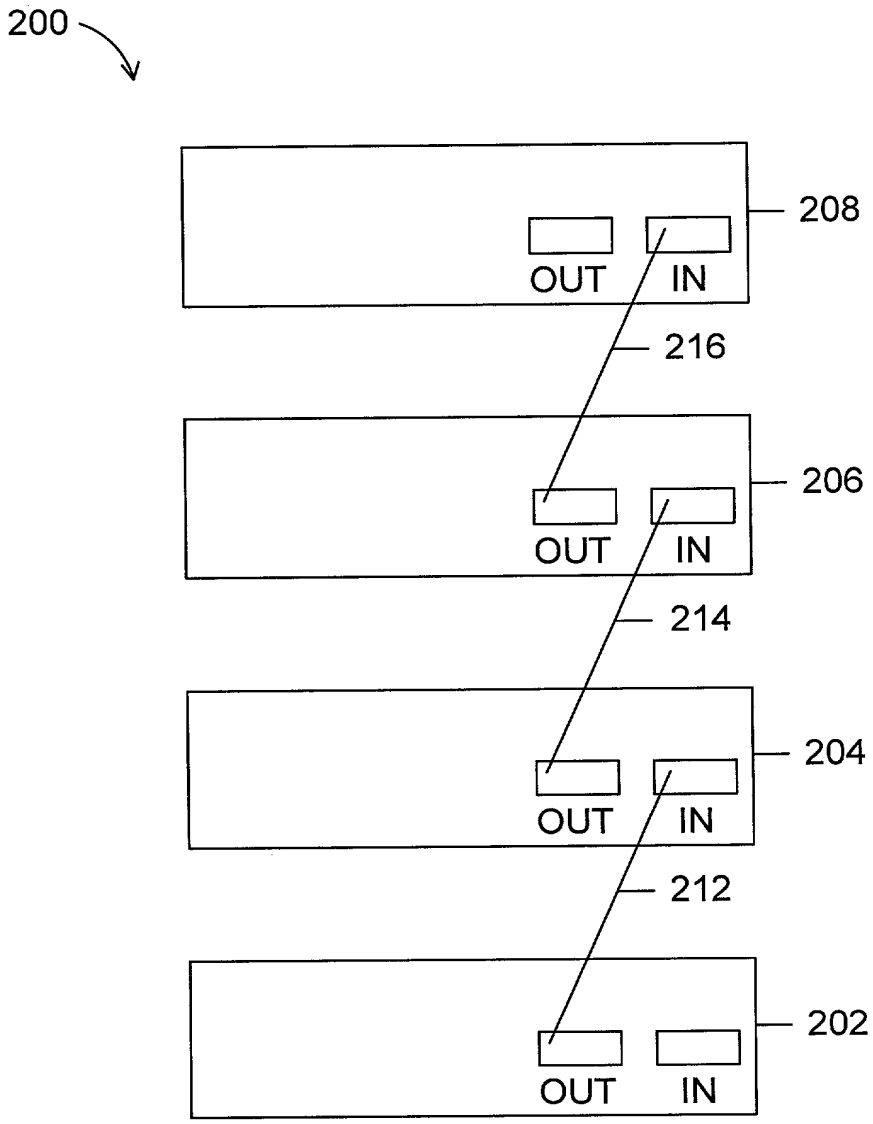

Figure 2

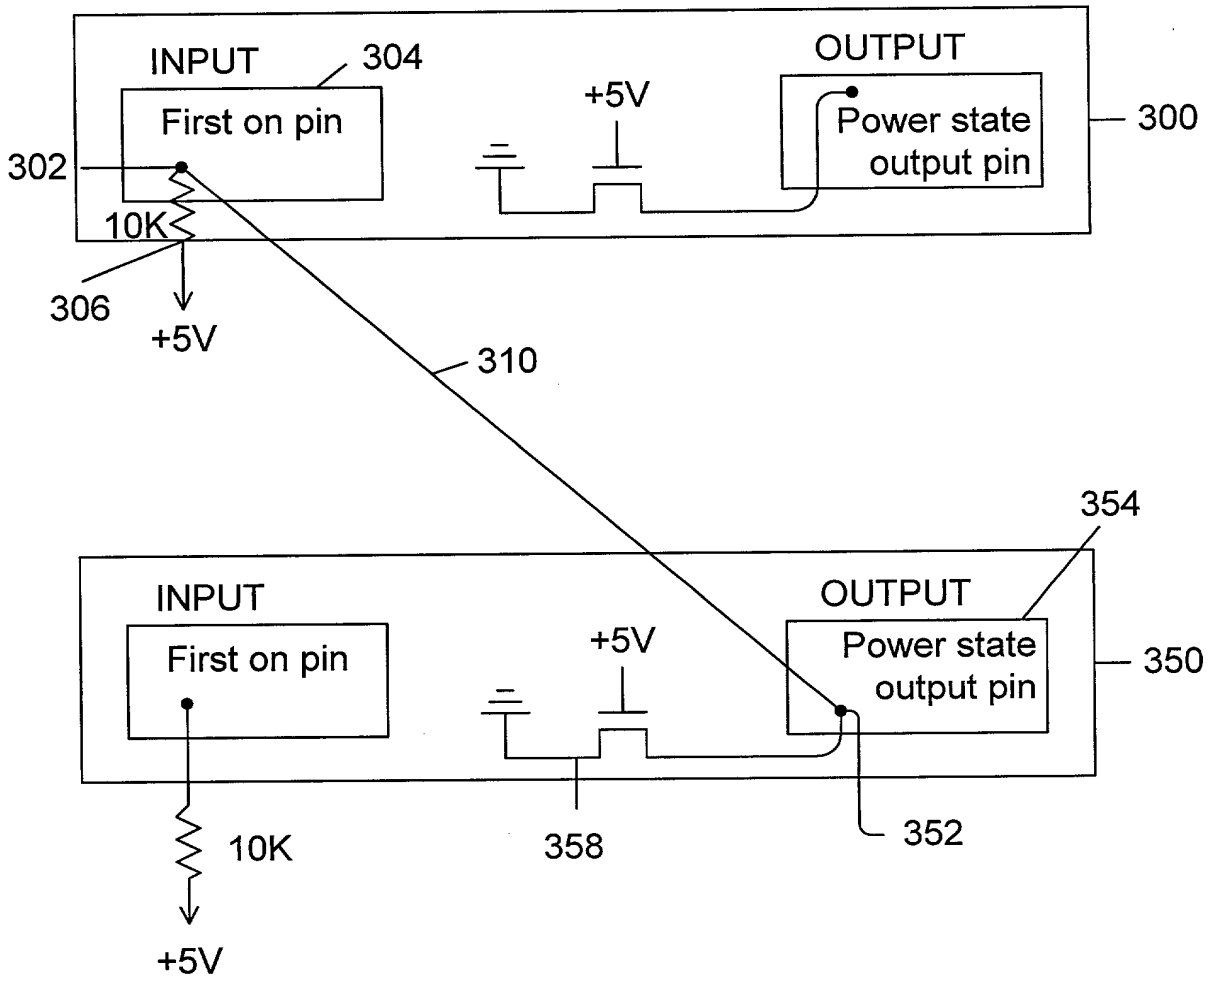
INPUT
304
First on pin
OUTPUT
+5V
Power state output pin
300
302
10K
306
+5V
310
354
INPUT
First on pin
OUTPUT
+5V
Power state output pin
350
10K
358
352
+5V

Figure 3

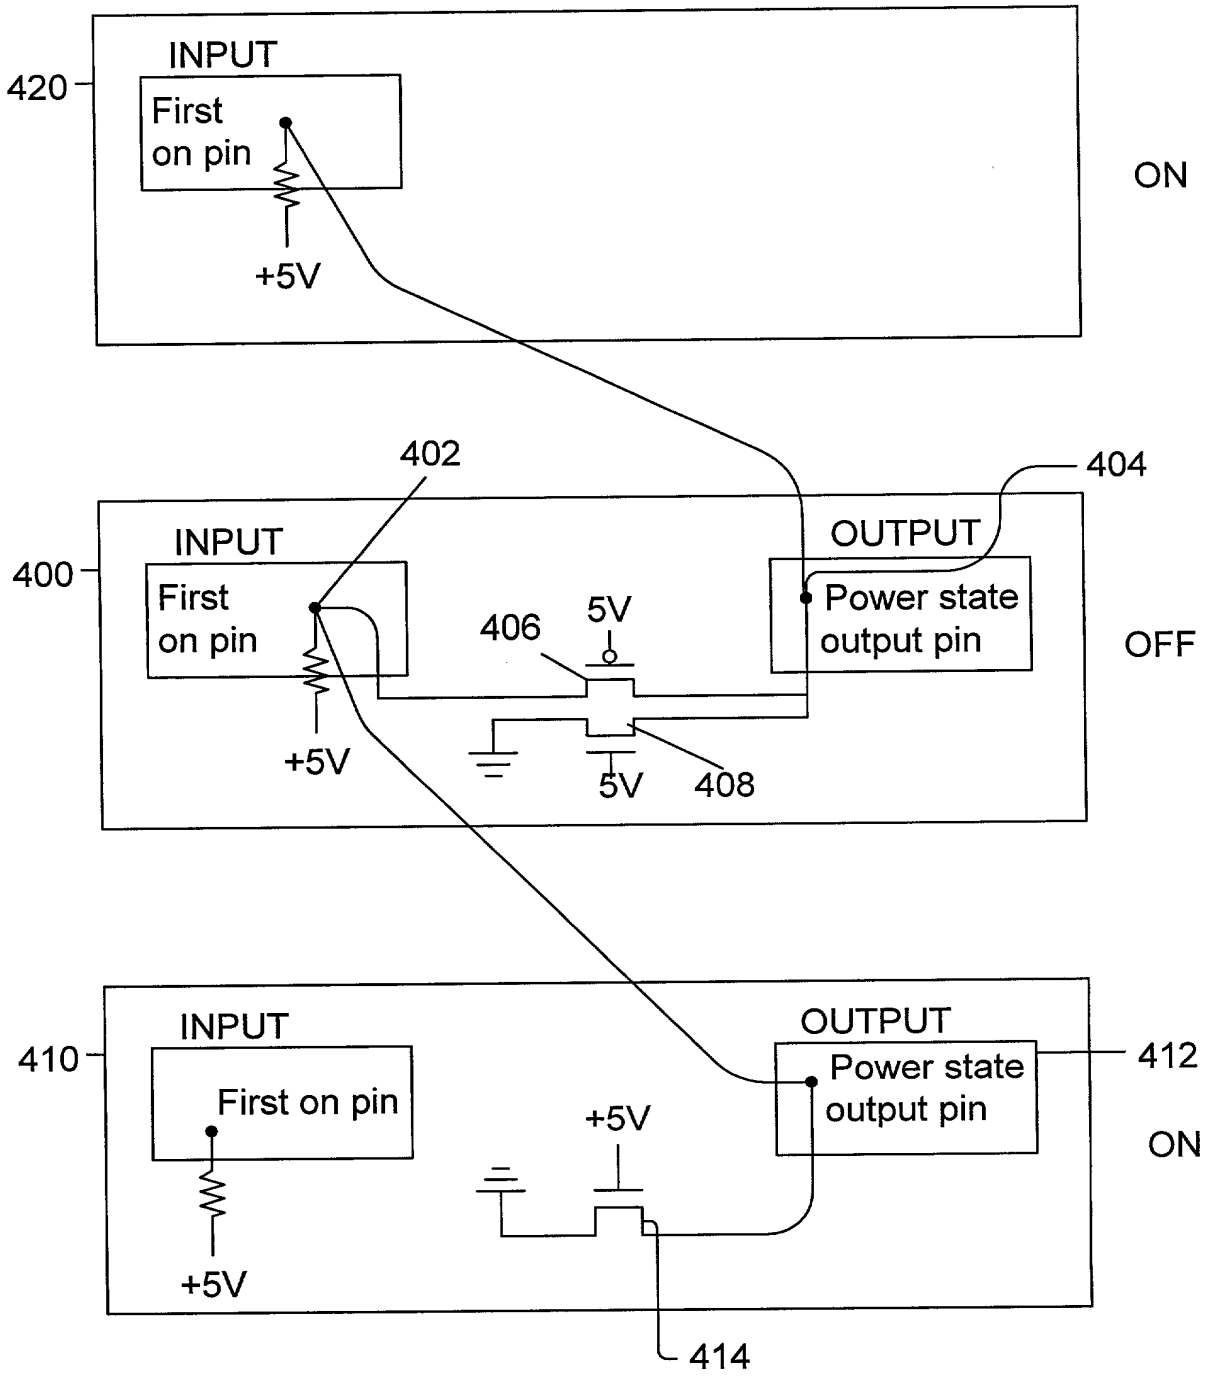
420
INPUT
First
on pin
+5V
ON
402
404
400
INPUT
First
on pin
+5V
406
5V
OUTPUT
Power state
output pin
OFF
5V
408
410
INPUT
First on pin
+5V
OUTPUT
Power state
output pin
412
ON
414

Figure 4

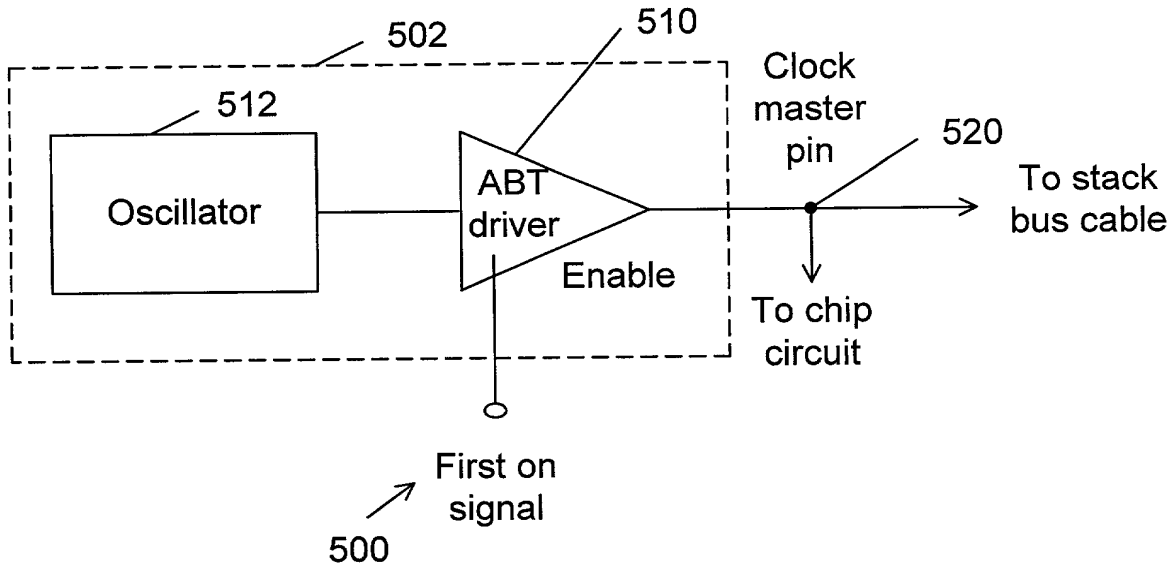
502
510
512
Clock
master
pin
520
Oscillator
ABT
driver
To stack
bus cable
Enable
To chip
circuit
First on
signal
500

Figure 5